

# PRO

## Show.PROFILE 80 COLOR - RGBW




This is our newest 80w IP65 Profile Light with Zoom, The most proud design is the way of zoom, we adopt the concept of camera zoom design, and applied it to the stage lighting , our this new leko zoom spotlight, zoom from 15~30°and 25-50 °optional

with crystal clear and even light projection, DMX control and support for RDM

selectable dimming curve modes, PWM from 500HZ to 25000HZ for matching any camera type, flicker free operation for Broadcast TV and Film. Fan-less no noise cooling system, this mini leko can go anywhere perfect for ancient museums, exhibitions, gallery, hotels, stores and small to medium theatres



**Size of the fixture: 383(D)\*180(W)\*280(H)mm**

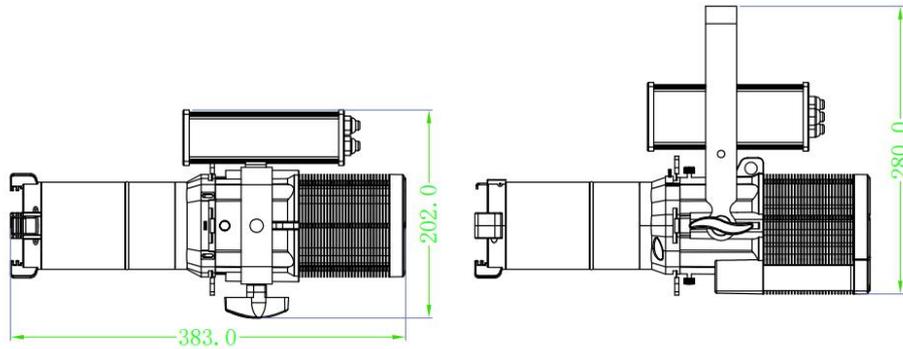

## **Descriptions:**

- 320W RGBW Engine  $\geq$ 84CRI , limited to 80W output
- With small size, light weight, portable to carry and install
- Beam angle is from 15-30° /25-50° optional
- Smooth 16-bit 0~100% linearly adjustable dimming
- Flicker free operation for Broadcast TV and Film.
- RDM (Remote Device Management) for added flexibility
- Adjustable PWM (Pulse Width Modulation) to avoid flickering on camera
- Selectable dimming curve: Standard mode, Incandescent mode, quick mode and linear mode
- Fanless (no any noise) operation for use in studio and theatre applications
- 4 pieces of shutter leaf included; Gobo holder, gobo are capable for usage
- Very suitable using for Museum, Restaurant, Children theater, Gallery, Outdoor Event

## **Specification:**

### **Light Source:**

Led power: 320W (limited to 80W output)

Light Color: RGBW

LED Lamp: Imported TAIWAN LED

Color Rendering Index(CRI):  $Ra \geq 84$

LED Life Time: over 50,000 hours

Output: 6339Lux@1m@15°

### **Power supply:**

Voltage :AC100V-240V 50-60Hz

Max.power: 80W

### **Optics:**

Beam angle: Zoom from 15-30° /25-50°

Manual zoom

Gobo and gobo holder: optional

Color Frame: optional

### **Features:**

Dimmer: 0~100% linearly adjustable

Strobe: 1-25times/sec

Dimming Curve: 4 kinds

Dimming Frequency: 500HZ - 25000HZ optional

Focus: Can be adjusted by hand

Light body: Die-casting Aluminum

Body color: Black

Feature of housing: Small volume, lightweight

### **Control:**

Control System: DMX512, mater and slave, auto running

DMX Channels: 4/9CH (Two kinds of channel modes optional)

### **Working Environment :**

Environment Temperature: -10°C~40°C

Cooling system: Fan-less no noise

IP Grade: IP65

### **Package :**

Net weight: 4kgs

Gross weight: 5kgs

Packing size: 51\*25.7\*20cm(1pc/carton), 55\*53\*41cm(4pcs/carton)